


TMC-E系列接触器 / TMC-E Series Contactor

适用于AC-1/AC-3使用类别的控制。




型号 / Cat. No.		TMC-9E			TMC-12E			TMC-18E				
主触头 Main Contacts/ Main Contacts/	额定绝缘电压 U_i	1000			1000			1000				
	连续通电电流 I_{th} AC1 IEC	20			25			25				
	额定电流 I_e 额定容量 P AC-3 IEC 60947-4-1 GB 14048.4	三相 3P	A	kW	HP	A	kW	HP	A	kW	HP	
	220/230V		9	2.5	3.5	12	3	4	18	4	5.5	
	380/400V		9	4	5.5	12	5.5	7.5	18	9	12	
415/440V	9		4	5.5	12	5.5	7.5	18	9	12		
660/690V	6.6	5.5	7.5	9	7.5	10	12	10	13.5			
辅助触头 Aux. Contacts/ Aux. Contacts/	额定绝缘电压 U_i	690			690			690				
	连续通电电流 I_{th} (AC/DC)	10/2.5			10/2.5			10/2.5				
	额定电流 I_e IEC 60947-5-1 GB 14048.5 UL 60947-4-1	AC 15	120V	6			6			6		
	240V		3			3			3			
380V	1.9			1.9			1.9					
线圈容量 Power Consumption	投入/Inrush(VA)	70			70			70				
	常时/Sealed(VA)	9			9			9				
	功率/Dissipated(W)	4			4			4				
操作频率/Operational Frequency	次/时/OPS/hn	1200			1200			1200				
电气寿命/Electrical Durability (Ops)	万次/Mio. OPS	100			100			100				
机械寿命/Mechanical Durability	万次/Mio. OPS	500			500			500				
触头结构(注 ¹) / Contact Configuration		3A1a, 3A1b			3A1a, 3A1b			3A1a, 3A1b				
重量 / Weight (kg)		0.28			0.28			0.28				
外形尺寸 / Dimensions (mm) a*b*c		70*45*82			70*45*82			70*45*82				

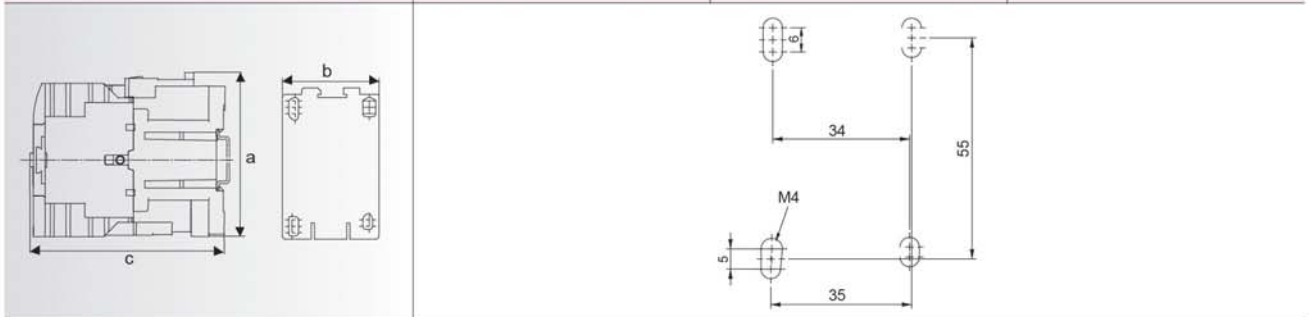

注1: A为常开主触头 B为常闭主触头 a为常开辅助触头 b为常闭辅助触头
A:NO Main Contacts B:NC Main contacts a:NO Aux. Contacts b:NC Aux. Contacts

型号标注说明 / Cat. No. Explanation

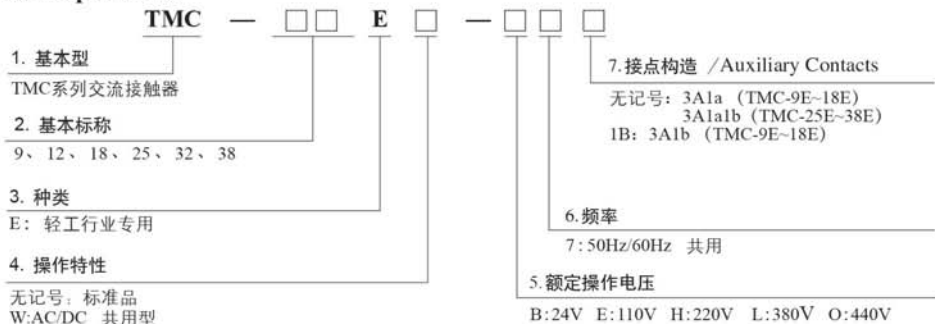

TMC-E系列接触器 / TMC-E Series Contactor

适用于AC-1/AC-3使用类别的控制。



型号 / Cat. No.		TMC-25E			TMC-32E			TMC-38E				
主触头 Main Contacts/	额定绝缘电压 U_i	1000			1000			1000				
	连续通电流 I_{th} AC1 IEC/UL	40			45			50				
	额定电流 I_e 额定容量 P AC-3 IEC 60947-4-1 GB 14048.4	三相 3P	220/230V	25	5.5	7.5	32	7.5	10	38	10	13.5
			380/400V	25	11	15	32	15	20	38	18.5	25
			415/440V	25	11	15	32	15	20	38	18.5	25
660/690V			18	15	20	22	18.5	25	22	18.5	25	
辅助触头 Aux. Contacts/	额定绝缘电压 U_i	690			690			690				
	连续通电流 I_{th} (AC/DC)	10/2.5			10/2.5			10/2.5				
	额定电流 I_e IEC 60947-5-1 GB 14048.5 UL 60947-4-1	AC 15	120V	6			6			6		
			240V	3			3			3		
380V			1.9			1.9			1.9			
线圈容量 Power Consumption	投入/Inrush(VA)	70			70			70				
	常时/Sealed(VA)	8.3			8.3			8.3				
	功率/Dissipated(W)	4			4			4				
操作频率/Operational Frequency	次/时/OPS/hn	1200			1200			1200				
电气寿命/Electrical Durability (Ops)	万次/Mio. OPS	100			100			100				
机械寿命/Mechanical Durability	万次/Mio. OPS	500			500			500				
触头结构(注 ¹) / Contact Configuration		3A1a1b			3A1a1b			3A1a1b				
重量 / Weight (Kg)		0.38			0.38			0.38				
外形尺寸 / Dimensions (mm) a*b*c		72*55*91.4			72*55*91.4			75*55*91.4				

注1: A为常开主触头 B为常闭主触头 a为常开辅助触头 b为常闭辅助触头
A:NO Main Contacts B:NC Main contacts a:NO Aux. Contacts b:NC Aux. Contacts